

# SpliceSeal™

## Concrete Reinforcement Protection System


US Patent No. 6,265,065

**Description:** SpliceSeal is a specially formulated "shrink tube" that allows for very fast and efficient sealing of joined reinforcing bars, to avoid corrosion. SpliceSeal can be used on bare bar, to patch damaged epoxy-coated bar, and to encapsulate joints, whether they're lapped-spliced, welded or joined with commercially available couplers, as shown here.



### Benefits:

- ☑ SpliceSeal eliminates the need to thoroughly clean joints, mix epoxy, paint it onto joints and then wait for it to dry...saving time and money.
- ☑ Unlike epoxy patching, there are no ambient temperature limitations to consider when applying SpliceSeal.
- ☑ SpliceSeal creates no hazardous wastes that must be disposed of.

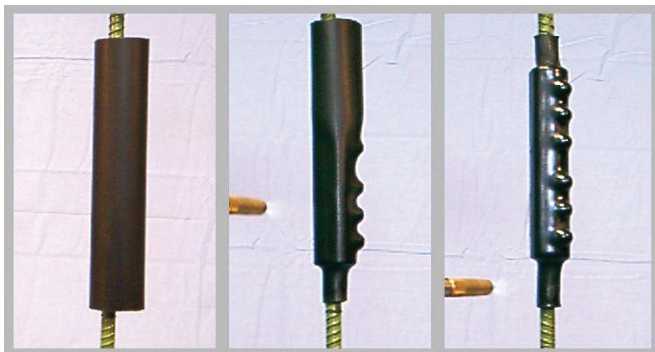

SpliceSeal is applied in seconds, using a hand-held torch. Bar Lock couplers shown.



SpliceSeal at San Mateo Bridge job site. Specified by CalTrans (see QPL 09/03). Headed Reinforcement couplers shown.

SS v2.0 (04/2007)

**RJD INDUSTRIES, INC**  
26945 CABOT ROAD, SUITE 105 LAGUNA HILLS, CA 92653-7009  
TELEPHONE: 800-344-4753 OR 949-582-0191 FACSIMILE: 949.582.0995  
[www.rjdindustries.com](http://www.rjdindustries.com)

